

Product Features and Specifications

FA7Ti Infinity Series Winch - Capacity: 12,600 lbs (5727 kg)

PFS-FA7Ti-09072010

Rugged Compact and Versatile Design

- Meets ANSI / ASME B30.7
- 5:1 design factor at rated load
- Top layer rated line pull
- "Lift to shift" winch mounted lever throttle
- Minimum 18:1 drum diameter to wire rope diameter ratio
- Compact gearbox-in-drum design
- Standard design temperature range is 0°C through 60°C
- Group of mechanism as per FEM: 5m
- Pre-certified lifting lugs

Suitable for Hazardous Explosion Proof Environments

- Flameproof by design. Air motors (unlike electric motors) are inherently spark resistant.
- ATEX classification (as per directive EC 94/9/EEC). CE compliant models marked EX II 2 GD c 200°C X

Powerful Radial Piston Air Motor

- Positive starting torque
- Infinitely variable speeds with precision spotting control
- Superior reliability in harsh environments

Brake Systems

- Manual drum brake standard
- Optional auto drum brake and /or auto disc available
- Fully enclosed automatic oil bath "wet" disc brake sealed against moisture and contaminants
- **Ingersoll Rand recommends the use of automatic brakes whenever a winch is used for lifting**

CE compliant versions provided with:

- Drum guard
- Overload protection (preset regulator)
- Emergency stop
- Muffler
- Automatic brake
- Limit switches
- CE documentation



FA7Ti with optional Auto Disc Brake and Accuspool Level Wind

Options and Accessories

- DNV & ABS Type Approved models available
- Low temperature versions
- Overload and E-stop control system
- Remote controls
- Limit switches
- Tensioning manifold
- Drum guards*
- Grooved drums
- Drum divider flanges
- Drum locks
- Spooling devices
- Marine paint systems
- Air line accessories

* Ingersoll Rand recommends using Drum Guards with all winches to prevent inadvertent contact with winch moving parts




Quality Engineering...
Safely Today

IR Ingersoll Rand
Industrial Technologies

Product Features and Specifications

FA7Ti Infinity Series Winch - Capacity: 12,600 lbs (5727 kg)

PFS-FA7Ti-09072010

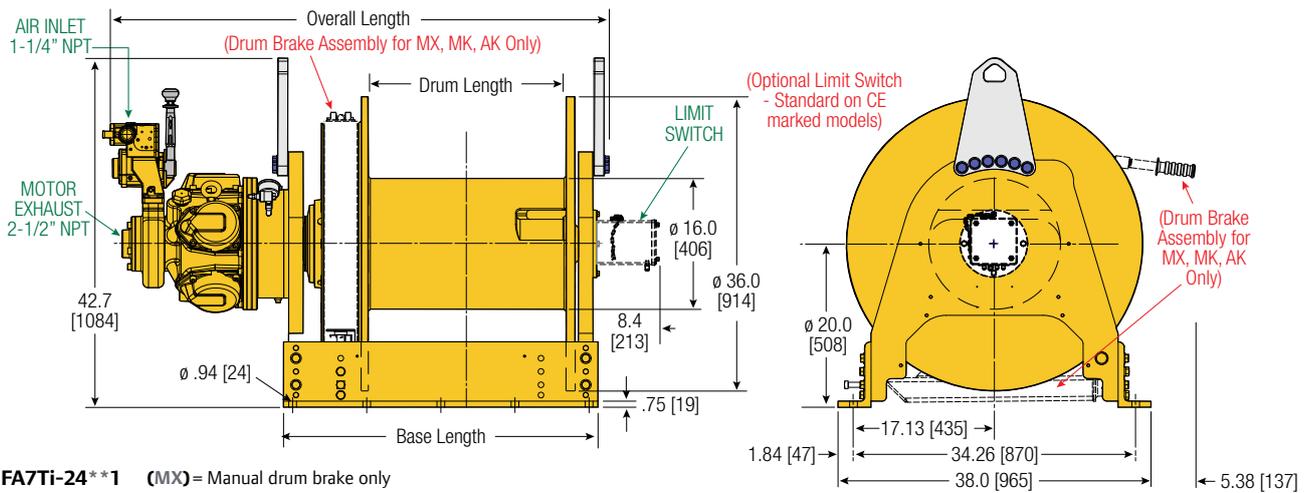


FA7Ti-24**1 (MX) = Manual drum brake only
 FA7Ti-36**1 (MK) = Manual drum & auto disc brakes
 (AK) = Automatic drum & auto disc brake
 (XK) = Disc brake only

Dimensions: FA7Ti and Bolt Down Pattern

	Drum Length 24" [610 mm]			Drum Length 36" [914 mm]		
	Drum & Disc Brakes (MK & AK)	Disc Brake Only (XK)	Drum Brake Only (MX)	Drum & Disc Brakes (MK & AK)	Disc Brake Only (XK)	Drum Brake Only (MX)
	in	mm	in	mm	in	mm
Overall Length	60.8	1544	57.4	1458	57.8	1468
Base Length	38.19	970	34.63	880	38.19	970
'A'	34.25	870	34.25	870	34.25	870
'B'	9.0	229	8.0	203	9.0	229
'C'	0.94	24	0.94	24	0.94	24
Total # Holes	10		10		10	

Bolt Down Pattern

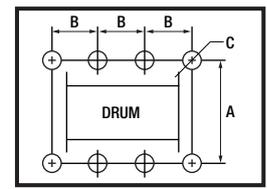

'C' = Bolt Hole Inside Diameter

Lift Ratings at 5:1 Design Factor (Performance at 6.3 Bar - 90 PSI at air inlet when winch is operating)

Model #	Top Layer				First Layer				Average Air Consumption ⁽¹⁾	Sound Level ⁽²⁾	Inlet Size NPT	Exhaust Size NPT	Net Weight lbs	Net Weight kg		
	Rated Capacity	Speed	Rated Capacity	Speed at	Stall Pull	Average Air Consumption ⁽¹⁾	Sound Level ⁽²⁾	Inlet Size NPT							Exhaust Size NPT	Net Weight lbs
	hp	lbs	kg	ft/min	m/min	ft/min	m/min	lbs	kg	f ³ /min	m ³ /min	db(A)				
FA7Ti	25.2	12,600	5727	48	15	38	12	35,946	16305	750	21	97	1-1/4"	2-1/2"	2,335	1059

(1) Average Air Consumption is at rated load and speed at top layer (2) With optional muffler

Drum Wire Rope Storage Capacity - Imperial - Utility

Series	Rated capacity lbs	Rope Diameter in	Min Req Break Strength* lbs	Accumulated rope capacity in feet / number of layers													
				1	2	3	4	5	6	7	8	9	10	11	12	13	14
FA7Ti-24	12,600	3/4	63,000	136	283	442	613	795	989	1,194	1,411	1,640	1,880	2,131	2,394	2,669	2,955
		7/8	63,000	117	245	385	536	699	873	1,059	1,256	1,465	1,685	1,917	2,160		
FA7Ti-36	12,600	3/4	63,000	206	430	671	930	1,206	1,500	1,811	2,140	2,486	2,850	3,231	3,630	4,047	4,481
		7/8	63,000	177	372	584	814	1,061	1,326	1,608	1,908	2,225	2,560	2,912	3,281		

Drum Wire Rope Storage Capacity - Metric - Utility

Series	Rated capacity kg	Rope Diameter mm	Min Req Break Strength* kg	Accumulated rope capacity in meters / number of layers													
				1	2	3	4	5	6	7	8	9	10	11	12	13	14
FA7Ti-24	5727	22	28576	35	74	116	162	211	263	320	379	443	509	579			
		25	28576	31	66	104	146	191	240	292	347	406	469				
FA7Ti-36	5727	22	28576	53	112	176	246	320	400	486	576	672	774	880			
		25	28576	48	100	158	222	290	365	444	529	618	714				

* Note: The Minimum Required Breaking Strength for the wire rope needs to be the Rated Capacity multiplied by the Design Factor. Example: for the FA7Ti-24 (with a 5:1 Design Factor) 12,600 x 5 = 63,000 lbs.



Quality Engineering...
Safety Today

Fisher Offshore

North Meadows, Oldmeldrum, Aberdeenshire, Scotland AB51 0GQ

Tel: +44 (0) 1651 873932

Fax: +44 (0) 1651 873939

ingersollrand@fisheroffshore.com

fisheroffshore.com

A James Fisher and Sons PLC Company