


# Stanley Hydraulic DL07 Drill



**The Stanley DL07 drill can be used for drilling holes in metal, masonry and wood.**

The drill comes as standard fitted with a 1/2" capacity chuck but can be fitted with a 5/8" capacity chuck. It has a dual position assist handle, feathering trigger for speed control and is reversible.

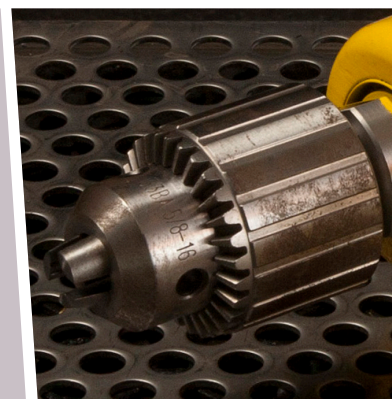

Stanley Hydraulic DL07 Drill	
Chuck Capacity	Ø1/2" / Ø12mm
Performance	0.5Nm@35 bar 1.2Nm@70 bar 1.9Nm@105 bar 2.6Nm@140 bar
Weight	2.7 kg
Length	22.90 cm
Pressure Max.	140 bar / 2000 psi
Flow Range	11.3—38 l/min 11.3 l/min—350rpm: 15 l/min-475rpm: 23 l/min-750rpm 30 l/min-1000rpm: 38 l/min-1250rpm
Porting	-8 SAE O-RING
Hose Whips	Yes
Connection Aeroquip 5100-12	Aeroquip 5100-12
Motor	Stanley Hyrevz™ Gear
System Type	Open Centre/Closed Centre
Features	Cast-in lifting/suspension eye

